



Single-deck model shown with options.

---

## P2X

Excel Single or Multi-Deck  
Produce Merchandiser


# Hussmann Excel Single or Multi-Deck Merchandiser for Produce Applications

**P2X-E - Single or Multi-Deck**

**P2X-EP - Single or Multi-Deck with E-Plus**


“Extra-High Efficiency” Coil

Available in 8' and 12' lengths. Contact your sales rep for information on possible availability of additional case lengths.

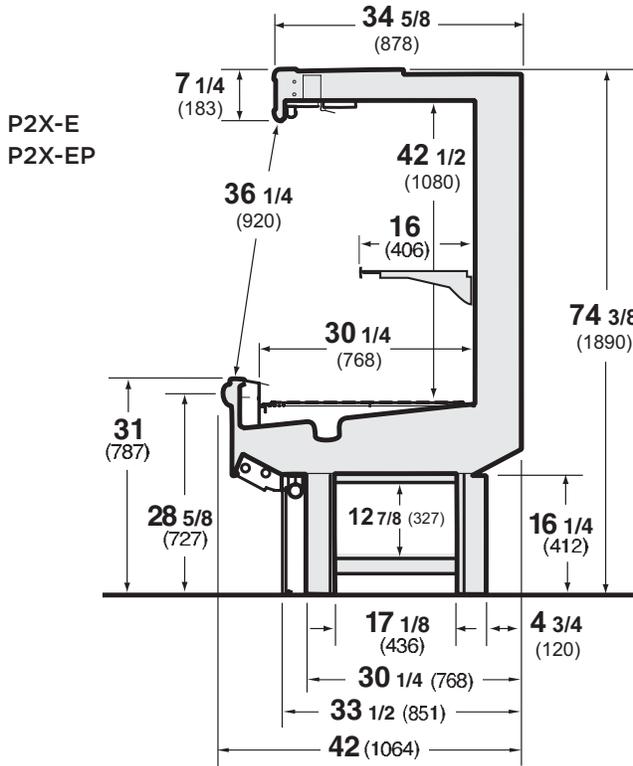

## Plan View

**P2X-E, P2X-EP**

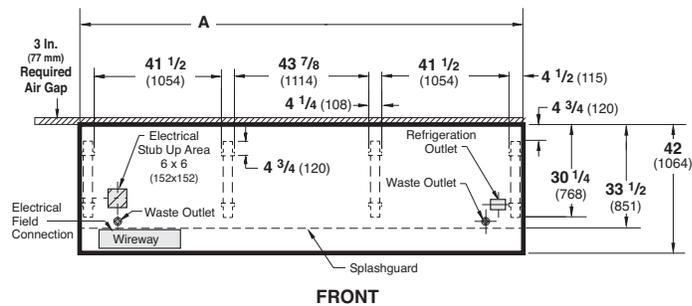

Dimension	8 FT	12 FT
A	96 3/8 (2448)	144 1/2 (3670)

### Notes:

Overall case length without ends or partitions.

### Note

Use Hussmann's technical data sheets to get precise dimensions for all store layout purposes.

## Superior Merchandising.

The P2X creates an appealing wall of produce in both single and two deck configurations. Superior display features include full vision glass ends, illuminated canopy signs, improved ledge lighting and more.

## Lower Energy Costs.

Energy efficient “E” coils are standard on the P2X. The “highest efficiency” E-Plus coils are optional, reducing energy costs by about 18% compared to a standard Impact produce case. Optional night curtains will further reduce energy by about 12%.

## Superior Shelf Life.

Modular coils and off-time defrost work to reduce thermal shock and stabilize product temperatures. Modular defrost, optional, can further stabilize temperatures.

## Lower Labor Costs.

Labor saving features include greater clearance under the case, easy-to-clean bathtub bottom, easier raceway access, 2-ft honeycomb sections and more.

## Superior Reliability.

Our five year modular coil warranty is the best available. Pre-set adjustable expansion valves are designed to hold optimal temperatures.

**DOE 2012 Energy Efficiency Compliant** Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2012 energy efficiency standards.

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75°F and 55% R.H.

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

For additional resources, contact your representative or visit [www.hussmann.com](http://www.hussmann.com).

**HUSSMANN®**

Hussmann Corporation  
12999 St. Charles Rock Rd.  
Bridgeton, MO 63044-2483  
Ph: 314.291.2000

[www.hussmann.com](http://www.hussmann.com)